


KEY FEATURES


- Claws made from Hardox
- Double guide bars
- Optimized roll in/roll out properties
- High pressure cylinder with double piston rod seals
- Extra reinforced body for rigid mounting (excavator design)

	TG 12 S	TG 16 S	TG 16 PRO S	TG 22 S	TG 22 PRO L	TG 22 PRO S	TG 23 S	TG 25 S	TG 25 PRO S	TG 28 S	TG 35 S	TG 42 S	TG 42 SM	TG 55 S	TG 55 SM	TG 80 SM
A	765	925	930	1287	1200	1200	1262	1450	1342	1490	1880	1831	1831	2438	2445	3115
B	588	590	515	594	617	623	631	746	723	785	807	982	982	1025	1025	1125
C	381	402	355	509	440	446	465	510	498	570	594	676	676	802	802	1571
D	38	60	47	87	65	65	55	40	72	100	65	100	100	150	150	180
E	263	301	344	321	432	432	411	391	482	508	522	533	533	633	633	1010
F	140X140 -M16	140X140 -M16	140x140 -17	140X140 -M16	173/6	173/6-17 & 140x140-17	140X140 -17	173/6	173/6-17 & 140x140-17	173/6	173/6	173/6	270/8	270/8	270/8	270/8

MODEL SPECIFICATIONS

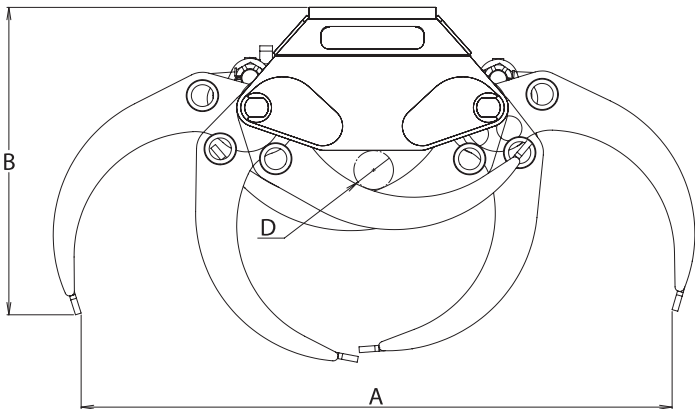


MODEL	Kg	m²	Bar	l/min	kN	tm	ton
TG 12 S	50	0,12	200	30	8	1	0,8
TG 16 S	65	0,16	200	40	9	3	1
TG 16 PRO S	76	0,16	200	50	7	4	1
TG 22 S	112	0,22	200	50	13,5	4	2
TG 22 PRO L	131	0,20	250	50	14,5	4	2
TG 22 PRO S	144	0,20	250	50	14,5	5	3
TG 23 S	130	0,23	200	50	13,5	5	2
TG 25 S	171	0,25	250	50	11	8	3
TG 25 PRO S	208	0,225	250	50	14,5	10	4
TG 28 S	275	0,30	300	60	16,6	12	5
TG 35 S	340	0,38	300	60	17,5	15	7
TG 42 S	408	0,50	300	70	21,8	20	8
TG 42 SM	500	0,50	300	70	21,8	25	10
TG 55 S	760	0,65	300	90	25	30	10
TG 55 SM	945	0,65	300	90	25	35	10

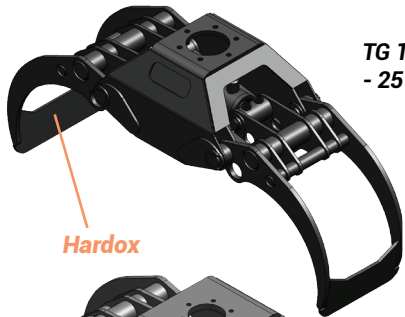

TG 16 PRO S - 25 PRO S



TG 28 S - 55 S

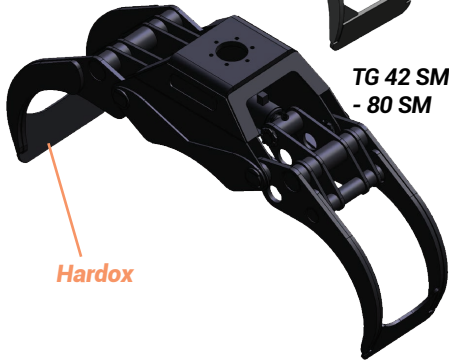

TG 42 SM - 80 SM

All grapples and grabs from Intermercato have claws made of Hardox.