

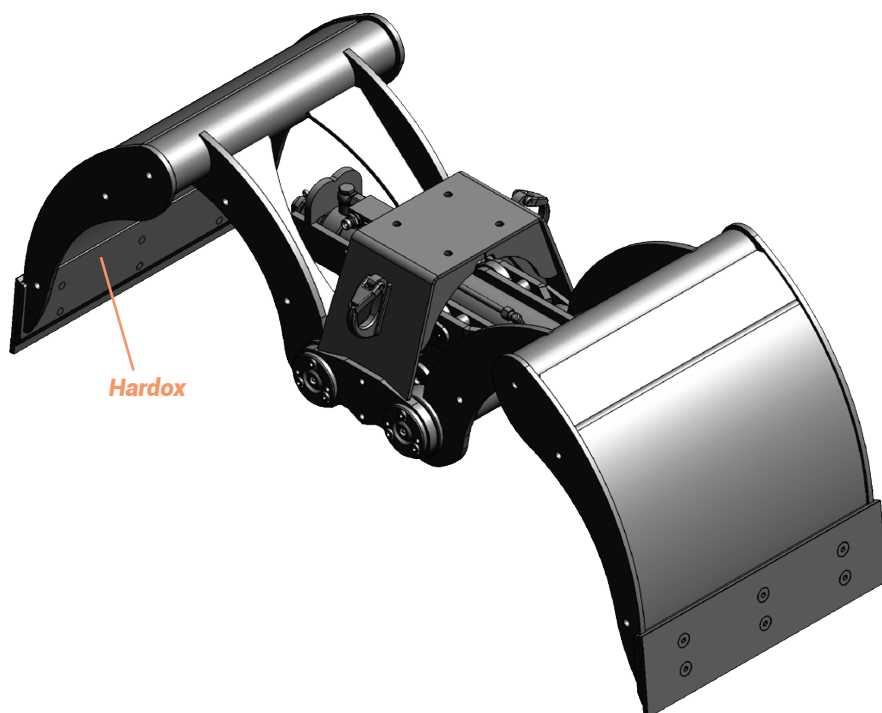


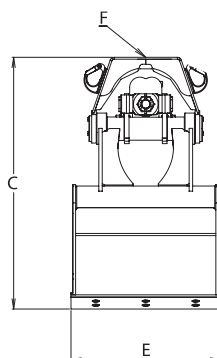

KEY FEATURES

- Double guide bars
- Cylinder with double piston rod seals for high pressure
- Clamshells made of Hardox
- Pilot operated check valve
- 2-t welded hooks
- Bolt-on reversible cutting edges made of Hardox
- Special bushings

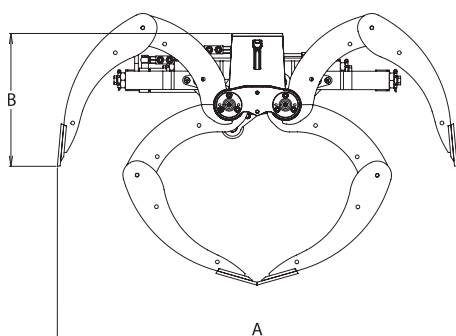

	TGO 500	TGO 650	TGO 800	TGO 900	TGO 1000	TGO 1200
A	1739	1739	1739	1739	1739	1739
B	578	578	578	578	578	578
C	1095	1095	1095	1095	1095	1095
E	500	650	800	900	1000	1200
F	140X140	140X140	140X140	140X140	140X140	140X140

MODEL SPECIFICATIONS



MODEL	Kg	Lt	Bar	l/min	kN	ton	min.
TGO 500	315	200	300	60	25	3	10
TGO 650	340	300	300	60	25	3	12
TGO 800	370	400	300	60	25	3	15
TGO 900	390	450	300	60	25	3	15
TGO 1000	405	500	300	60	25	3	15
TGO 1200	440	600	300	60	25	3	15