

INTERMERCATO®
HIGH PERFORMANCE LIFT & LOAD ATTACHMENTS

Universal grabs TG SR

The 5- or 7 claw all-round tool from Intermercato. Only your imagination sets the limits of this extremely versatile grab. It's popularity speaks for itself. The TG SR is so robust, it's suitable for rigid mounting on excavator.




KEY FEATURES

- Made of Hardox®
- Extra reinforced body for rigid mounting
- TG 28 SR5 and up + the entire PRO-series have homogeneous guide bars made of Hardox®
- Optimal roll in- roll out properties
- Cylinder with double piston rod seals for high pressure

DEFINITELY A BEAST.

www.intermercato.com

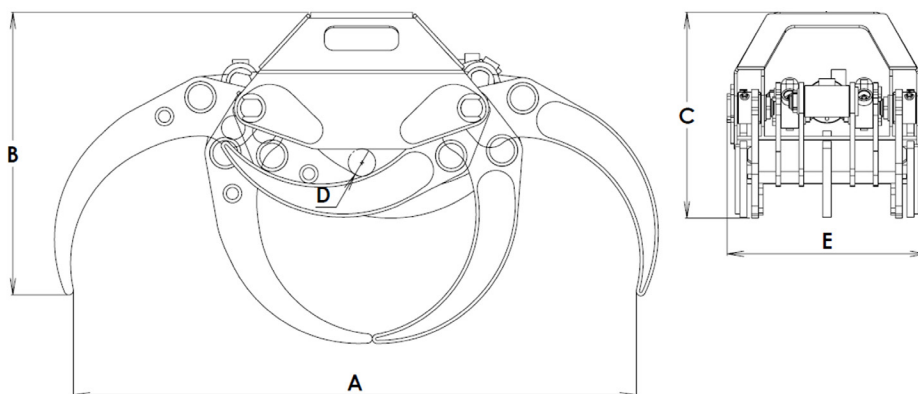

	TG 12 SR5	TG 16 SR5	TG 16 PROSR5	TG 16 PROSR7	TG 22 PROSR5	TG 25 PROSR5	TG 28 SR5	TG 35 SR5	TG 42 SR5	TG 55 SR5
A	810	933	950	950	1225	1370	1500	1890	1895	2425
B	550	590	482	482	585	675	735	763	912	967
C	350	400	355	355	440	495	565	594	677	796
D	38	60	47	50	60	72	95	65	100	150
E	273	287	344	344	432	478	508	522	533	635

MODEL SPECIFICATIONS



MODEL	Kg	m ²	Bar	l/min	kN	ton	tm	tm	ton	ton		
TG 12 SR5	60	0,12	200	30	8	0,8	2,5	4	1-3	-	-	-
TG 16 SR5	75	0,16	200	35	16,7	1	3	5	1-3	-	-	-
TG 16 PRO SR5	81	0,16	200	35	7,25	2	4	7	1-6	1-4	Yes	Yes
TG 16 PRO SR7	88	0,16	200	35	7,25	2	4	7	1-6	1-4	Yes	Yes
TG 22 PRO SR5	156	0,20	250	40	14,5	3	5	10	4-10	4-6	Yes	Yes
TG 25 PRO SR5	230	0,225	250	50	14,5	4	10	15	6-12	6-8	Yes	Yes
TG 28 SR5	306	0,30	250	50	16,6	5	12	30	8-16	8-12	Yes	Yes
TG 35 SR5	393	0,38	250	60	17,2	7	15	35	10-20	10-14	Yes	Yes
TG 42 SR5	480	0,50	250	60	21,8	8	20	40	12-22	12-16	Yes	Yes
TG 55 SR5	910	0,65	250	70	24,2	10	30	-	14-25	14-18	-	-

Recommended machine weight and crane size



INTERMERCATO®

High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

